

11/16/00



JC960 U.S. PTO

11-17-00

A

LIMBACH & LIMBACH L.L.P.
2001 Ferry Building, San Francisco, CA 94111
415/433-4150

Address to:

Box Patent Application
Commissioner for Patents
Washington, D.C. 20231

Attorney's Docket No. SONY-U0429

First Named Inventor SATORU MATSUDA

UTILITY PATENT APPLICATION TRANSMITTAL
(under 37 CFR 1.53(b))

SIR:

Transmitted herewith for filing is the patent application entitled:
VIRTUAL SPACE SYSTEM, VIRTUAL SPACE CONTROL DEVICE, VIRTUAL SPACE CONTROL
METHOD, AND RECORDING MEDIUM

JC915 U.S. PTO

09/714743




11/16/00

CERTIFICATION UNDER 37 CFR § 1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date November 16, 2000, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EL776051275US addressed to: Box Patent Application, Commissioner for Patents, Washington, D.C. 20231.

Susan Ozanne

(Name of person mailing paper)


(Signature)

Enclosed are:

1. ☒ Transmittal Form (two copies required)
2. The papers required for filing date under CFR § 1.53(b):
 - i. 26 Pages of specification (including claims and abstract);
 - ii. 8 Sheets of drawings.
☐ formal ☒ informal
3. Declaration or oath
 - a. ☒ Unsigned -Combined with Power of Attorney

ACCOMPANYING APPLICATION PARTS

4. ☐ An assignment of the invention to Sony Corporation is attached (including Form PTO-1595).
 - i. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)
5. ☒ Power of Attorney - Unsigned -Combined with Declaration
6. ☐ An Information Disclosure Statement (IDS) is enclosed, including a PTO-1449 and copies of ☐ references.
7. ☐ Preliminary Amendment.
8. ☒ Return Receipt Postcard (MPEP 503 -- should be specifically itemized)
9. FOREIGN PRIORITY
 - [x] Priority of application no. P11-333074 filed on November 24, 1999 in Japan is claimed under 35 USC 119.

The certified copy of the priority application:

- ☒ is filed herewith; or
- ☐ has been filed in prior application no. ☐ filed on ☐ or
- ☐ will be provided.

☐ English Translation Document (if applicable)

10. FEE CALCULATION

- a. ☐ Amendment changing number of claims or deleting multiple dependencies is enclosed.

CLAIMS AS FILED

| | Number Filed | Number Extra | Rate | Basic Fee (\$710) |
|-------------------------------------|--------------|--------------|-----------|-------------------|
| Total Claims | 11 - 20 | * 0 | x \$18.00 | 0 |
| Independent Claims | 4 - 3 | * 1 | x \$80.00 | 80.00 |
| Multiple dependent claim(s), if any | | | \$270.00 | 0 |

*If less than zero, enter "0".

Filing Fee Calculation \$790.00

50% Filing Fee Reduction (if applicable) \$

11. Small Entity Status

- a. ☐ A small entity statement is enclosed.
b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
c. ☐ is no longer claimed.

12. Other Fees

- ☐ Recording Assignment [\$40.00] \$0
☐ Other fees
Specify \$0

Total Fees Enclosed \$790.00

13. Payment of Fees

- ☒ Check(s) in the amount of \$ 790.00 enclosed.
☐ Charge Account No. 12-1420 in the amount of \$__.
A duplicate of this transmittal is attached.

14. All correspondence regarding this application should be forwarded to the undersigned attorney:

Charles P. Sammut
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111
Telephone: 415/433-4150
Facsimile: 415/433-8716

15. Authorization to Charge Additional Fees


- ☒ The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or § 1.17 to Account No. 12-1420. **A duplicate of this transmittal is attached.**

LIMBACH & LIMBACH L.L.P.

November 16, 2000
(Date)

Attorney Docket No. SONY-U0429
[SOOP1429US00]

By:

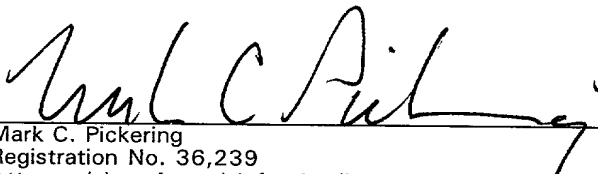
Mark C. Pickering
Registration No. 36,239
Attorney(s) or Agent(s) for Applicant(s)

VIRTUAL SPACE SYSTEM, VIRTUAL SPACE CONTROL DEVICE, VIRTUAL
SPACE CONTROL METHOD, AND RECORDING MEDIUM

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a virtual space system having a chat function, a virtual space control device, a virtual space control method, and a recording medium, and particularly to a virtual space system in which only a chat in a restricted region is recorded, a virtual space control device, a virtual space control method, and a recording medium storing a program causing a computer to execute the function.

2. Description of the Related Art

In recent years, with the advance of an electric communication information network such as the Internet, communication through a chat using electric communication means has become popular. The chat is a system in which a plurality of users connect with a predetermined server through an electric communication line and documents are transmitted and received in real time through the server to have a conversation. Although the mainstream of a conventional chat function is such that text information composed of only documents is exchanged to have a conversation, in recent years, there has appeared such a visual chat that a virtual space is formed on a server, a user makes a character (hereinafter

referred to as an avatar) acting for the user himself or herself join in the virtual space, and the user has a chat with an avatar of another user while operating his or her avatar in the virtual space. In such a visual chat, since the user moves his avatar in the virtual space and can have a chat with another avatar upon which the user comes across in the virtual space, it is possible to have the chat in an atmosphere closer to an actual conversation than a conventional form.

Although the contents of documents exchanged through the chat in this way are recorded in the server, according to circumstances, there also occurs a case where the contents of all chats performed in the virtual space are not recorded but only the contents of a chat performed in a restricted region are recorded. In the case where an attempt is made to record only the contents of a chat made in the restricted region like this, conventionally, such a method as to construct one virtual space by a plurality of servers and to record the chat contents in each server has been carried out.

However, in the method of using the plurality of servers, there is a problem that a chat with an avatar belonging to another server can not be made.

Besides, in this method, there is a problem that the plurality of servers must be started, so that the system can not be made simple.

SUMMARY OF THE INVENTION

The present invention has been made in view of such problems, and an object of the invention is to provide a virtual space system in which a region where a chat is recorded can be freely set without reducing a chat feasible region and complicating a system, a virtual space control device, a virtual space control method, and a recording medium storing a program for causing a computer to execute the function.

According to the present invention, in a virtual space system having a chat function, the virtual space system is characterized by comprising a virtual space control device including transmission object holding means for holding latest position information of a transmitter in a virtual space and transmission region definition information for defining a transmission region as a closed region at a side of the transmitter, and reception object holding means for holding latest position information of a reception object and reception region definition information for defining a reception region as a closed region at a side of the reception object, and chat storage means for storing only contents of a chat issued from the transmitter in the reception region or only contents of a chat issued from the transmitter when the reception object enters the transmission region.

Here, the transmission object holding means holds the latest position information of the transmitter in the virtual

space and the transmission region definition information for defining the transmission region as the closed region at the side of the transmitter, the reception object holding means holds the latest position information of the reception object and the reception region definition information for defining the reception region as the closed region at the side of the reception object, and the chat storage means stores the contents of the chat issued from the transmitter in the reception region or the contents of the chat issued from the transmitter when the reception object enters the transmission region.

Besides, in a virtual space control device for controlling a virtual space having a chat function, the virtual space control device is characterized by comprising transmission object holding means for holding latest position information of a transmitter in the virtual space and transmission region definition information for defining a transmission region as a closed region at a side of the transmitter, and reception object holding means for holding latest position information of a reception object and reception region definition information for defining a reception region as a closed region at a side of the reception object, wherein only contents of a chat issued from the transmitter in the reception region or only contents of a chat issued from the transmitter when the reception object enters the transmission

region are stored.

Here, the transmission object holding means holds the latest position information of the transmitter in the virtual space and the transmission region definition information for defining the transmission region as the closed region at the side of the transmitter, and the reception object holding means holds the latest position information of the reception object and the reception region definition information for defining the reception region as the closed region at the side of the reception object.

Further, in a control method of a virtual space having a chat function, the virtual space control method is characterized by comprising the steps of holding latest position information of a transmitter in the virtual space and transmission region definition information for defining a transmission region as a closed region at a side of the transmitter, holding latest position information of a reception object and reception region definition information for defining a reception region as a closed region at a side of the reception object, and storing only contents of a chat issued from the transmitter in the reception region or only contents of a chat issued from the transmitter when the reception object enters the transmission region.

By this, in the virtual space, it becomes possible to freely set a region in which a chat is recorded.

Further, a recording medium is characterized by comprising the steps of storing a program for causing a computer to execute functions of holding latest position information of a transmitter in a virtual space and transmission region definition information for defining a transmission region as a closed region at a side of the transmitter, holding latest position information of a reception object and reception region definition information for defining a reception region as a closed region at a side of the reception object, and storing only contents of a chat issued from the transmitter in the reception region or only contents of a chat issued from the transmitter when the reception object enters the transmission region.

By causing the program stored in the recording medium to be started in a computer, it becomes possible to freely set a region where a chat is recorded in the virtual space.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a structural view showing a structure of a virtual space system.

FIG. 2 is a view showing the contents of a user object.

FIG. 3 is a view showing an example of a transmission region defined by transmission region definition information.

FIG. 4 is a view showing an example of a transmission region defined by transmission region definition information.

FIG. 5 is a view showing an example of a transmission region defined by transmission region definition information.

FIG. 6 is a view showing the contents of a chat reception object.

FIG. 7 is a flowchart showing a judgement procedure as to whether or not a chat is recorded.

FIG. 8 is a flowchart exemplifying a specific procedure of judgement at step S2 and step S5 in FIG. 7.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will be described below with reference to the drawings.

FIG. 1 is a structural view showing a structure of a virtual space system 1 of this embodiment.

The virtual space system 1 is constituted by a server 2 as a virtual space control device for controlling a virtual space, an application object server 3 as a reception object control device for preparing and controlling a reception object, a chat storage file 4 as chat storage means for storing the contents of a chat issued from a transmitter, a network 5 as electric communication means with which a plurality of users connect, and clients 6a, 6b and 6c as users for operating the transmitters in the virtual space.

Here, the server 2 includes user objects 21a, 21b and 21c as transmission object holding means for holding latest

position information of the transmitter in the virtual space and transmission region definition information for defining a transmission region as a closed region at the side of the transmitter, and chat reception objects 22a and 22b as reception object holding means for holding latest position information of the reception object and reception region definition information for defining a reception region as a closed region at the side of the reception object

The application object server 3 includes application objects 3a and 3b as prepared reception objects.

The user objects 21a, 21b, and 21c are provided in one-to-one correspondence to the clients 6a, 6b and 6c, and the respective clients 6a, 6b and 6c issue instructions to the corresponding user objects 21a, 21b and 21c through the network 5.

The application object server 3 can communicate with the server 2, the chat reception objects 22a and 22b are provided in one-to-one correspondence to the application objects 3a and 3b, and the chat reception objects 22a and 22b are dynamically defined in accordance with the change of the application objects 3a and 3b.

The chat storage file 4 is electrically connected to the server 2.

FIG. 2 is a view showing the contents of the user object 21a. Incidentally, the user objects 21b and 21c also have the

same contents as the user object 21a.

The user object 21a is constituted by latest position information 21aa, transmission region definition information 21ab, and other attributes 21ac.

The latest position information 21aa is latest position information of the transmitter in the virtual space. The transmission region definition information 21ab is information for defining a transmission region where a chat is recorded in the virtual space, and is defined by two-dimensional elements in the virtual space. Incidentally, this transmission region may be defined while relation to the latest position information 21aa is established.

FIGS. 3 to 5 are views showing examples of transmission regions 23, 24 and 25 defined by the transmission region definition information 21ab. Incidentally, in these drawings, directions parallel to the paper plane are made an x axis and a z axis, and a direction normal to the paper plane is made a y axis.

FIG. 3 is a view showing the transmission region 23 defined by a polygonal column. The transmission region 23 is an inner region of the polygonal column defined by two-dimensional elements of the x axis and the z axis, and restriction in the y-axis direction is not provided in this transmission region 23. Reference characters S1 to S7 designate apexes of this polygonal column, and the shape of the

transmission region 23 is set by the number of these and the respective x-z coordinates.

FIG. 4 is a view showing the transmission region 24 defined by a segmental column. The transmission region 24 is an inner region of the segmental column defined by two-dimensional elements of the x axis and the z axis, and restriction in the y-axis direction is not provided in this transmission region 24. Here, α and β designate angles from a certain reference line, and by these, the extension of the segmental column is defined. Besides, γ designates a radius of the segmental column.

Similarly to the transmission region 24, the transmission region 25 of FIG. 5 is also an inner region of a segmental column defined by two-dimensional elements of the x axis and the z axis, and restriction in the y-axis direction is not provided also in this transmission region 25. The difference between the transmission regions 25 and 24 is in a method of defining the segmental column. In the transmission region 24, angles from the certain reference line are made α and β , and the extension of the segmental column is defined by these angles. On the other hand, in the transmission region 25, left-right angles with respect to a direction related to a direction of a transmitter, for example, a visual field direction are made α and β , and the extension of the segmental column is defined by those. Here, the visual field direction

indicates a visual field direction of a transmitter in the virtual space, and by defining the transmission region 25 in this way, it is possible to determine a more realistic transmission region in the virtual space.

FIG. 6 is a view showing the contents of the chat reception object 22a. Incidentally, the chat reception object 22b also has the same contents as the chat reception object 22a.

The chat reception object 22a is constituted by latest position information 22aa of the application object 3a, reception region use flag information 22ab as reception region use information indicating whether the reception region is used, reception region definition information 22ac, and other attributes 22ad.

The latest position information 22aa is latest position information of the application object 3a in the virtual space. The reception region use flag information 22ab indicates whether the reception region is used. The reception region definition information 22ac is information defining a reception region where a chat is recorded in the virtual space, and is defined by two-dimensional elements in the virtual space. Incidentally, this reception region may be defined while relation to the latest position information 22aa is established. The method of defining the reception region may be the same as the transmission region, and is defined like, for example,

the transmission regions 23, 24 and 25 shown in FIGS. 3 to 5.

Next, with reference to FIGS. 1, 2 and 6, the operation of the virtual space 1 will be described.

The clients 6a, 6b and 6c using the virtual space system 1 first connect with the server 2 through the network 5, and make their own avatars join in the virtual space. In the case where the respective clients 6a, 6b and 6c operate the respective avatars and chats are made in the virtual space, in accordance with the following judgement procedure, the server 2 judges whether or not recording of an issued chat is made.

First, the server refers to the reception region use flag information held by the respective chat reception objects 22a and 22b, and judges whether or not it is the content indicating that the reception region is used. In the case where it is the content indicating that the reception region is used (in the case of truth), the latest position information of the avatar which becomes a transmitter held by the user object corresponding to the client issuing the chat is compared with the reception region defined by the chat reception object in which the reception region use flag information is true, and it is judged whether or not the latest position of the transmitter is contained in this reception region. Here, in the case where it is judged that the position is contained in the reception region, the contents of the issued chat are

recorded in the chat storage file 4. At this time, recording to the chat storage file 4 is made while correspondence is made to each chat reception object defining the reception region in which the latest position of the transmitter is contained. On the other hand, in the case where it is judged that the latest position of the transmitter is not contained in this reception region, recording of the issued chat is not made.

In the case where the reception region use flag information is the content indicating that the reception region is not used (in the case of falsehood), the latest position information of the application object is compared with the transmission region of the transmitter issuing the chat, and it is judged whether or not the latest position of the application object is contained in this transmission region. Here, in the case where it is judged that the latest position is contained in the transmission region, the contents of the issued chat are recorded in the chat storage file 4. At this time, recording to the chat storage file 4 is made while correspondence is made to the application object contained in the transmission region of the transmitter issuing the chat. On the other hand, in the case where the latest position of the application object is not contained in this transmission region, recording of the issued chat is not made.

FIG. 7 is a flowchart showing a judgement procedure as to whether or not a chat is recorded.

(S1) Reference is made to the reception region use flag information held by the respective chat reception objects 22a and 22b, and judgement is made as to whether or not it is true. In the case of truth, the procedure proceeds to step S2. In the case of falsehood, the procedure proceeds to step S5.

(S2) It is judged whether or not the latest position of the transmitter is contained in the reception region.

(S3) In the case where the position is contained in the reception region, the procedure proceeds to step S4. In the case where the position is not contained, the processing is ended.

(S4) The contents of the issued chat are recorded for each chat reception object having the reception region where the transmitter of the chat is contained.

(S5) It is judged whether or not the latest position of the application object is contained in the transmission region.

(S6) In the case where it is judged that the latest position is contained in the transmission region, the procedure proceeds to step S7. In the case where it is judged that the position is not contained, the processing is ended.

(S7) The contents of the issued chat are made to correspond to the application object contained in the transmission region of the transmitter issuing the chat and are recorded.

FIG. 8 is a flowchart exemplifying a specific procedure

of judgement at step S2 and step S5 of FIG. 7. Incidentally, in this example, the transmission region 23 shown in FIG. 3 is used as a region.

(S11) One of the apexes of the polygon constituting the region is made S_n .

(S12) It is judged whether or not an apex which becomes a standard for judgement returns to an apex of a start point. In the case where it returns to the apex of the start point, the procedure proceeds to step S15. In the case where it does not return to the apex of the start point, the procedure proceeds to step S13.

(S13) A straight line is drawn to the apex S_n from the position of the object to which judgement as to whether or not it is in the region is made, and next, an amplitude (angle range restricted by an angle between the straight line drawn from the object to the apex S_n and one reference line provided, and an angle between the straight line drawn from the object to the apex S_{n+1} and this reference line) when one end of the straight line is shifted from the apex S_n to the next apex S_{n+1} is recorded.

(S14) S_n is made S_{n+1} . By this, the apex S_n as the reference of judgement is shifted to the next apex.

(S15) It is judged whether or not the whole angle range of 0 to 2π is occupied by all amplitudes recorded at step S13. In the case where the whole angle range is occupied, the

procedure proceeds to step S16. In the case where the whole angle range is not occupied, the procedure proceeds to step S17.

(S16) It is judged that the object is in the region.

(S17) It is judged that the object is outside the region.

Like this, in this embodiment, the server 2 is provided with the user objects 21a, 21b and 21c for holding the latest position information of the transmitter in the virtual space and the transmission region definition information for defining the transmission region, and the chat reception objects 22a and 22b for holding the latest position information of the application objects 3a and 3b, and the reception region definition information for defining the reception region, and only the contents of a chat issued from the transmitter in the reception region or only the contents of a chat issued from the transmitter when the reception object enters the transmission region are recorded in the chat storage file 4. Thus, by setting the transmission region and the reception region, the range where the chat is recorded can be restricted in the same server, and it becomes possible to freely set the region where the chat is recorded, without reducing the chat feasible region and without complicating the system.

Besides, since the transmission region and the reception region of this embodiment are closed regions constituted by two-dimensional elements, as compared with a closed region

simply set by a sphere, the degree of freedom of the set shape is high, and it becomes possible to make detailed setting of the region where the chat is recorded.

Incidentally, in this embodiment, although the chat storage file 4 is connected to the server 2, it may be connected to the application object server 3 instead of the server 2. In this case, the contents of a chat on which judgement to record is made by the server 2 are transferred from the server 2 to the application server 3, and the application server 3 records the contents of the transferred chat in the chat storage file 4.

Besides, in this embodiment, although the chat reception objects 22a and 22b are dynamically defined correspondingly to the application objects 3a and 3b prepared by the application object server 3, such a structure may be adopted that the application object server 3 is not used but the chat reception objects 22a and 22b are read from a file at the time of starting the server.

Incidentally, the foregoing processing function can be realized by a computer. In that case, the processing contents of functions included in the server 2 and the application object server 3 are described in a program recorded in a computer readable recording medium. Then, this program is executed by the computer, so that the above processing is realized by the computer. As the computer readable recording medium, there is

a magnetic recording device, a semiconductor memory or the like. In the case where it is put on the market, the program is stored in a portable recording medium, such as a CD-ROM (Compact Disk Read Only Memory) or a floppy disk, and can be put on the market, it can be provided to a user in a state where it is previously stored in a computer, it can be downloaded in a user's computer through a network, or it is stored in a memory device of a computer connected through a network and can be transferred to other computers through the network. When executed by the computer, the program is stored in a hard disk or the like in the computer, and it is loaded in a main memory and is executed.

As described above, in the virtual space system of the present invention, the transmission object holding means for holding the latest position information of the transmitter and the transmission region definition information, and the reception object holding means for holding the latest position information of the reception object and the reception region definition information for defining the reception region are provided, and only the contents of a chat issued from the transmitter in the reception region or only the contents of a chat issued from the transmitter when the reception object enters the transmission region are recorded, so that the range where the chat is recorded can be restricted in the same server by setting the transmission region and the reception region, and it becomes possible to freely set the region where the chat

is recorded, without reducing the chat feasible region and complicating the system.

Besides, in the virtual space control device of the present invention, the transmission object holding means for holding the latest position information of the transmitter and the transmission region definition information, and the reception object holding means for holding the latest position information of the reception object and the reception region definition information for defining the reception region are provided, and only the contents of a chat issued from the transmitter in the reception region or only the contents of a chat issued from the transmitter when the reception object enters the transmission region are recorded, so that the range where the chat is recorded can be restricted in the same server by setting the transmission region and the reception region, and it becomes possible to freely set the region where the chat is recorded, without reducing the chat feasible region and complicating the system.

Besides, in the virtual space control method of the present invention, the latest position information of the transmitter and the transmission region definition information are held, the latest position information of the reception object and the reception region definition information for defining the reception region are held, and only the contents of a chat issued from the transmitter in the

reception region or only the contents of a chat issued from the transmitter when the reception object enters the transmission region are recorded, so that the range where the chat is recorded can be restricted in the same server by setting the transmission region and the reception region, and it becomes possible to freely set the region where the chat is recorded, without reducing the chat feasible region and complicating the system.

Besides, in the recording medium of the present invention, there is stored a program for causing a computer to execute functions of holding the latest position information of the transmitter and the transmission region definition information, holding the latest position information of the reception object and the reception region definition information for defining the reception region, and recording only the contents of a chat issued from the transmitter in the reception region or only the contents of a chat issued from the transmitter when the reception object enters the transmission region, so that the range where the chat is recorded can be restricted in the same server by setting the transmission region and the reception region, and it becomes possible to freely set the region where the chat is recorded, without reducing the chat feasible region and complicating the system.

WHAT IS CLAIMED IS:

1. A virtual space system having a chat function, comprising:

a virtual space control device including transmission object holding means for holding latest position information of a transmitter in a virtual space and transmission region definition information for defining a transmission region as a closed region at a side of the transmitter, and reception object holding means for holding latest position information of a reception object and reception region definition information for defining a reception region as a closed region at a side of the reception object; and

chat storage means for storing only contents of a chat issued from the transmitter in the reception region or only contents of a chat issued from the transmitter when the reception object enters the transmission region.

2. A virtual space system according to claim 1, wherein the reception object holding means further holds reception region use information indicating whether the reception region is used,

in a case where the reception region use information indicates that the reception region is not used, the chat storage means stores only the contents of the chat issued from the transmitter when the reception object enters the

transmission region, and

in a case where the reception region use information indicates that the reception region is used, the chat storage means stores only the contents of the chat issued from the transmitter in the reception region.

3. A virtual space system according to claim 2, wherein in a case where the reception region use information indicates that the reception region is not used, storage of the contents of the chat is made while relation to the reception object holding means which has entered the transmission region is established, and in a case where the reception region use information indicates that the reception region is used, the storage is made while relation to the reception object holding means relative to the reception region where the transmitter has entered is established.

4. A virtual space system according to claim 1, wherein the transmission region and the reception region are closed regions defined by two-dimensional elements.

5. A virtual space system according to claim 1, wherein the transmission region and the reception region are inner regions of polygonal columns each having a section of a polygon drawn on a horizontal plane in the virtual space.

6. A virtual space system according to claim 1, wherein the transmission region and the reception region are inner regions of segmental columns each having a section of a segment

drawn on a horizontal plane in the virtual space.

7. A virtual space system according to claim 1, wherein the transmission region is defined while relation to the latest position information of the transmitter is established, and the reception region is defined while relation to the latest position information of the reception object is established.

8. A virtual space system according to claim 1, further comprising a reception object control device for preparing and controlling the reception object,

wherein the latest position information of the reception object and the reception region definition information are set while relation to the reception object is established.

9. A virtual space control device for controlling a virtual space having a chat function, comprising:

transmission object holding means for holding latest position information of a transmitter in the virtual space and transmission region definition information for defining a transmission region as a closed region at a side of the transmitter; and

reception object holding means for holding latest position information of a reception object and reception region definition information for defining a reception region as a closed region at a side of the reception object,

wherein only contents of a chat issued from the transmitter in the reception region or only contents of a chat

issued from the transmitter when the reception object enters the transmission region are stored.

10. A control method of a virtual space having a chat function, comprising the steps of:

holding latest position information of a transmitter in the virtual space and transmission region definition information for defining a transmission region as a closed region at a side of the transmitter;

holding latest position information of a reception object and reception region definition information for defining a reception region as a closed region at a side of the reception object; and

storing only contents of a chat issued from the transmitter in the reception region or only contents of a chat issued from the transmitter when the reception object enters the transmission region.

11. An information providing medium for providing a program which causes a computer to execute functions of:

holding latest position information of a transmitter in a virtual space and transmission region definition information for defining a transmission region as a closed region at a side of the transmitter;

holding latest position information of a reception object and reception region definition information for defining a reception region as a closed region at a side of

the reception object; and

storing only contents of a chat issued from the transmitter in the reception region or only contents of a chat issued from the transmitter when the reception object enters the transmission region.

ABSTRACT OF THE DISCLOSURE

In a virtual space system, it is made possible to freely set a region where a chat is recorded, without reducing a chat feasible region and complicating the system. A server is provided with user objects for holding latest position information of a transmitter in a virtual space and transmission region definition information for defining a transmission region, and chat reception objects for holding latest position information of application objects and reception region definition information for defining a reception region, and only contents of a chat issued from the transmitter in the reception region or only contents of a chat issued from the transmitter when the reception object enters the transmission region are stored in a chat storage file.

FIG. 1

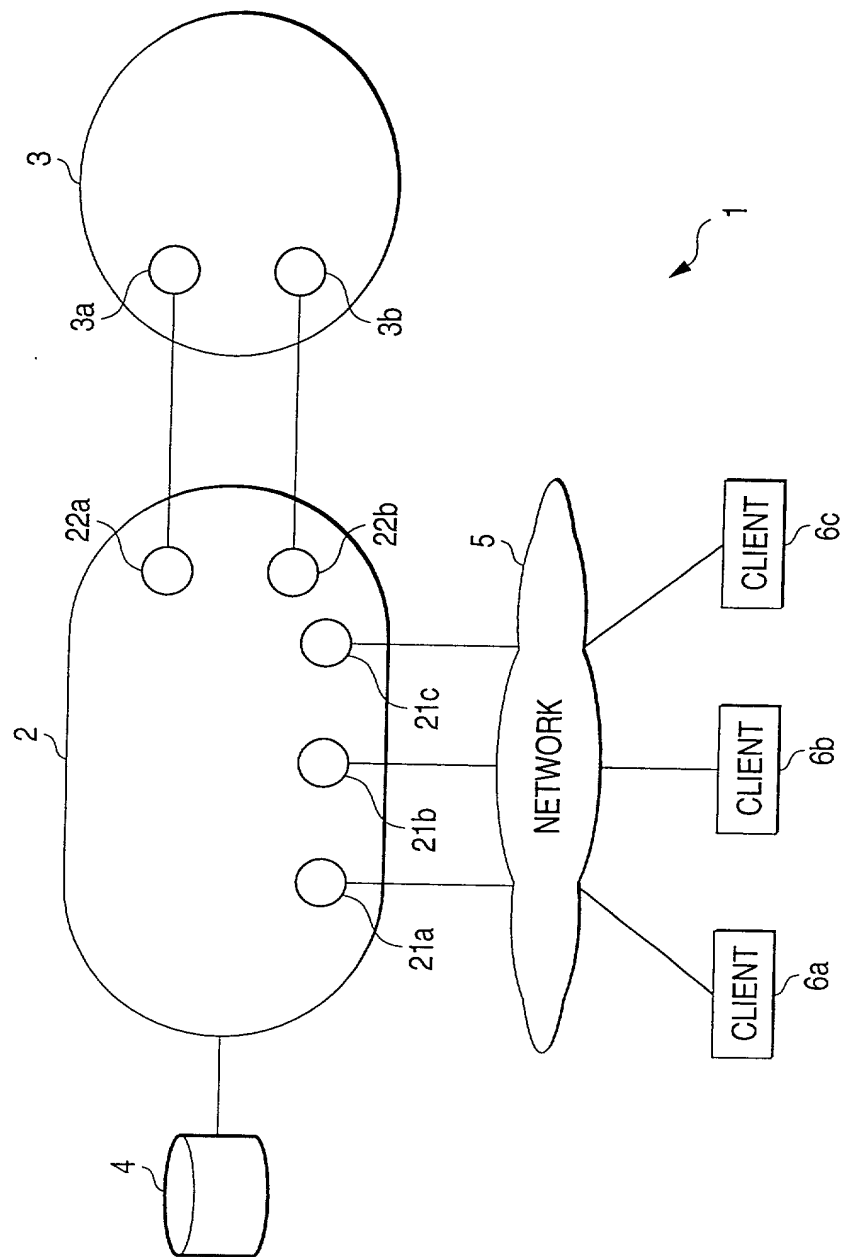


FIG. 2

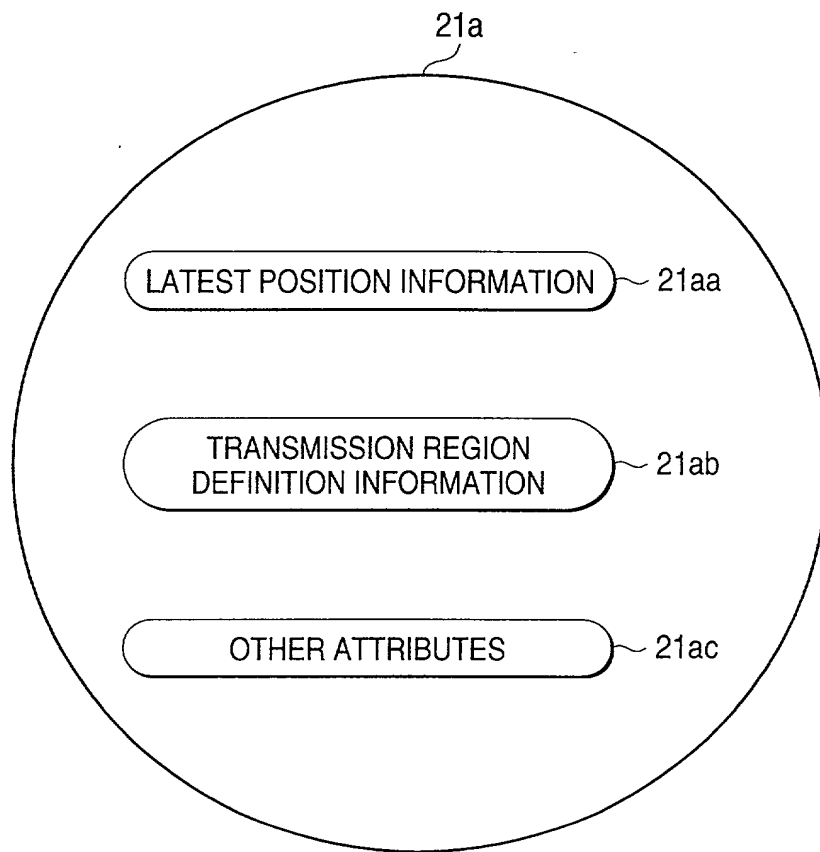


FIG. 3


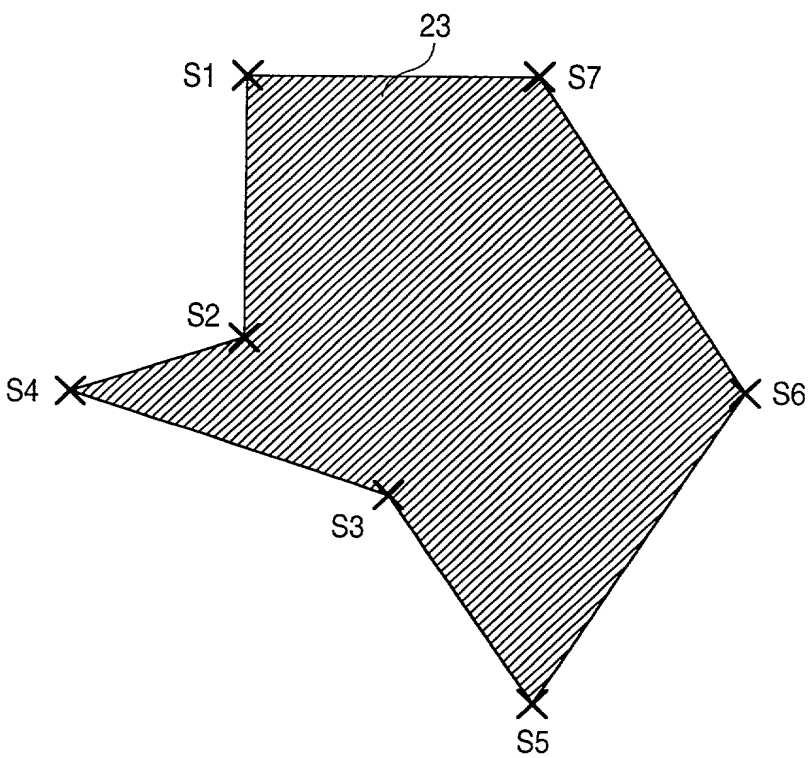


FIG. 4


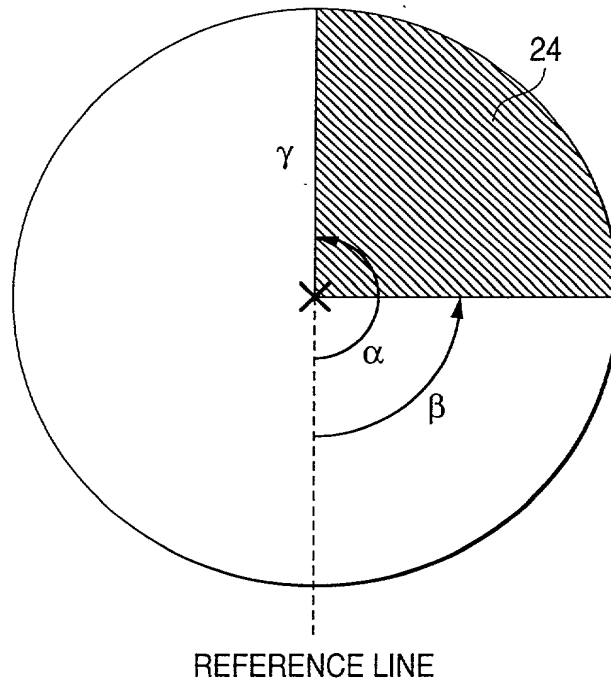


FIG. 5

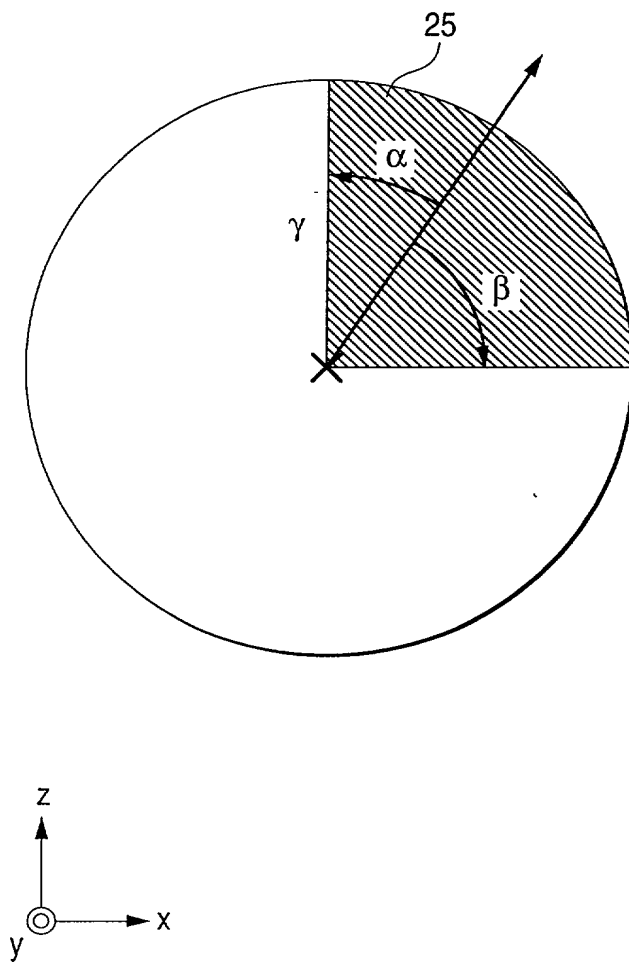


FIG. 6

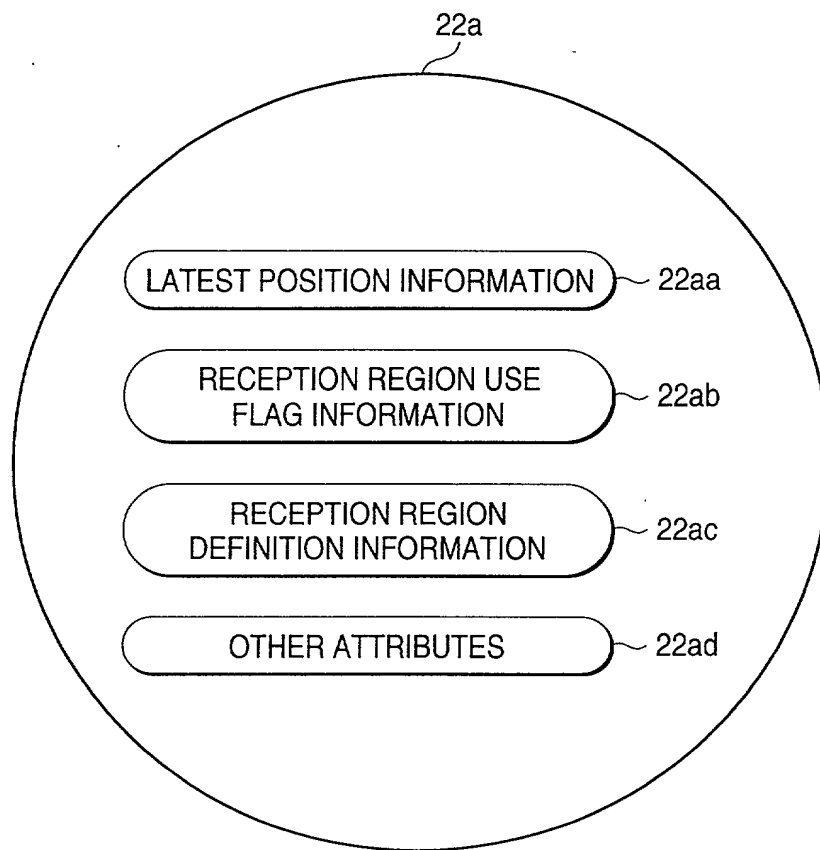


FIG. 7


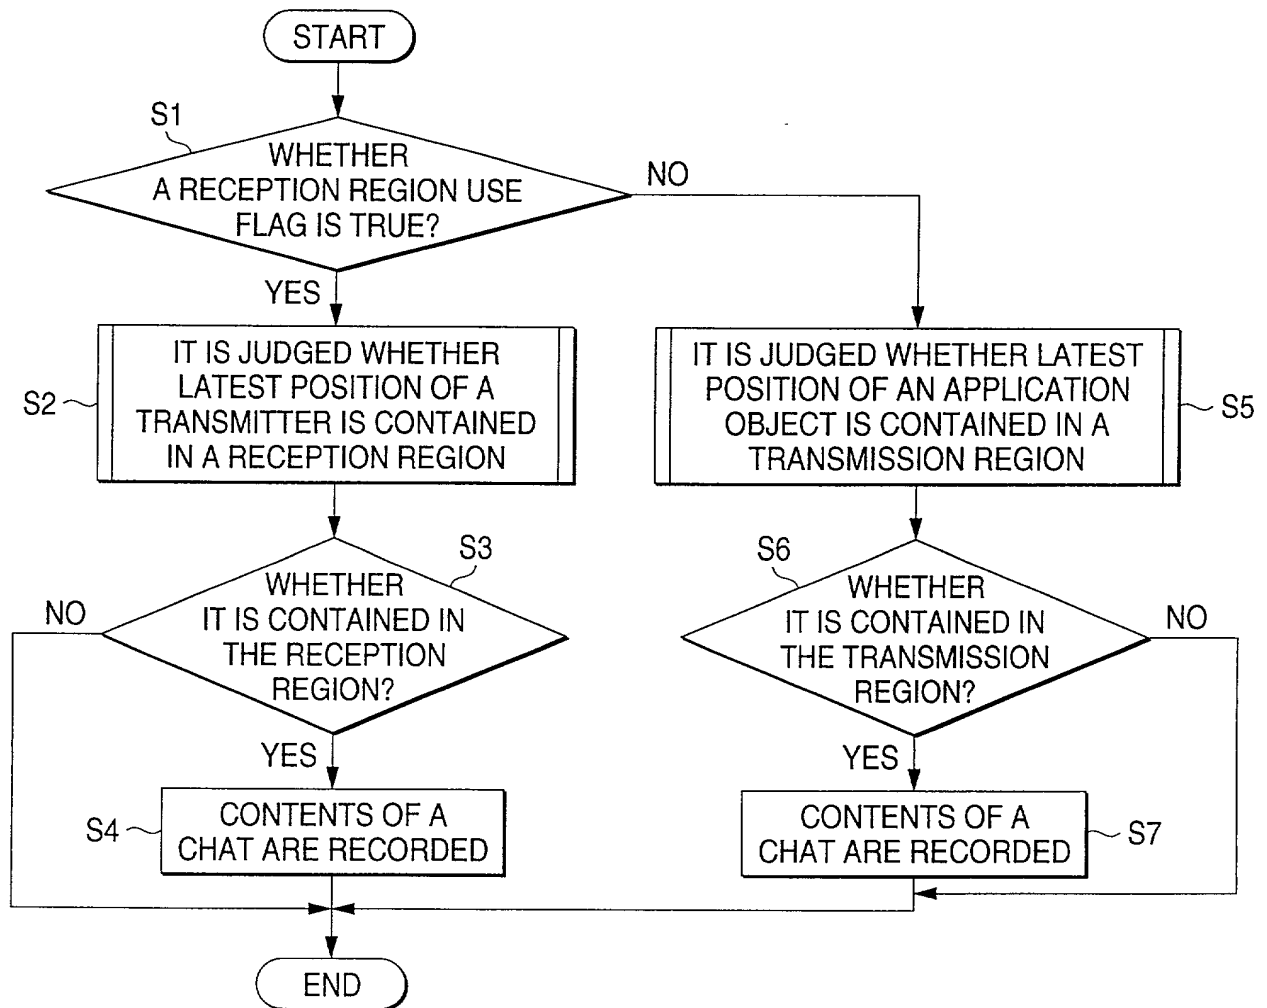


FIG. 8

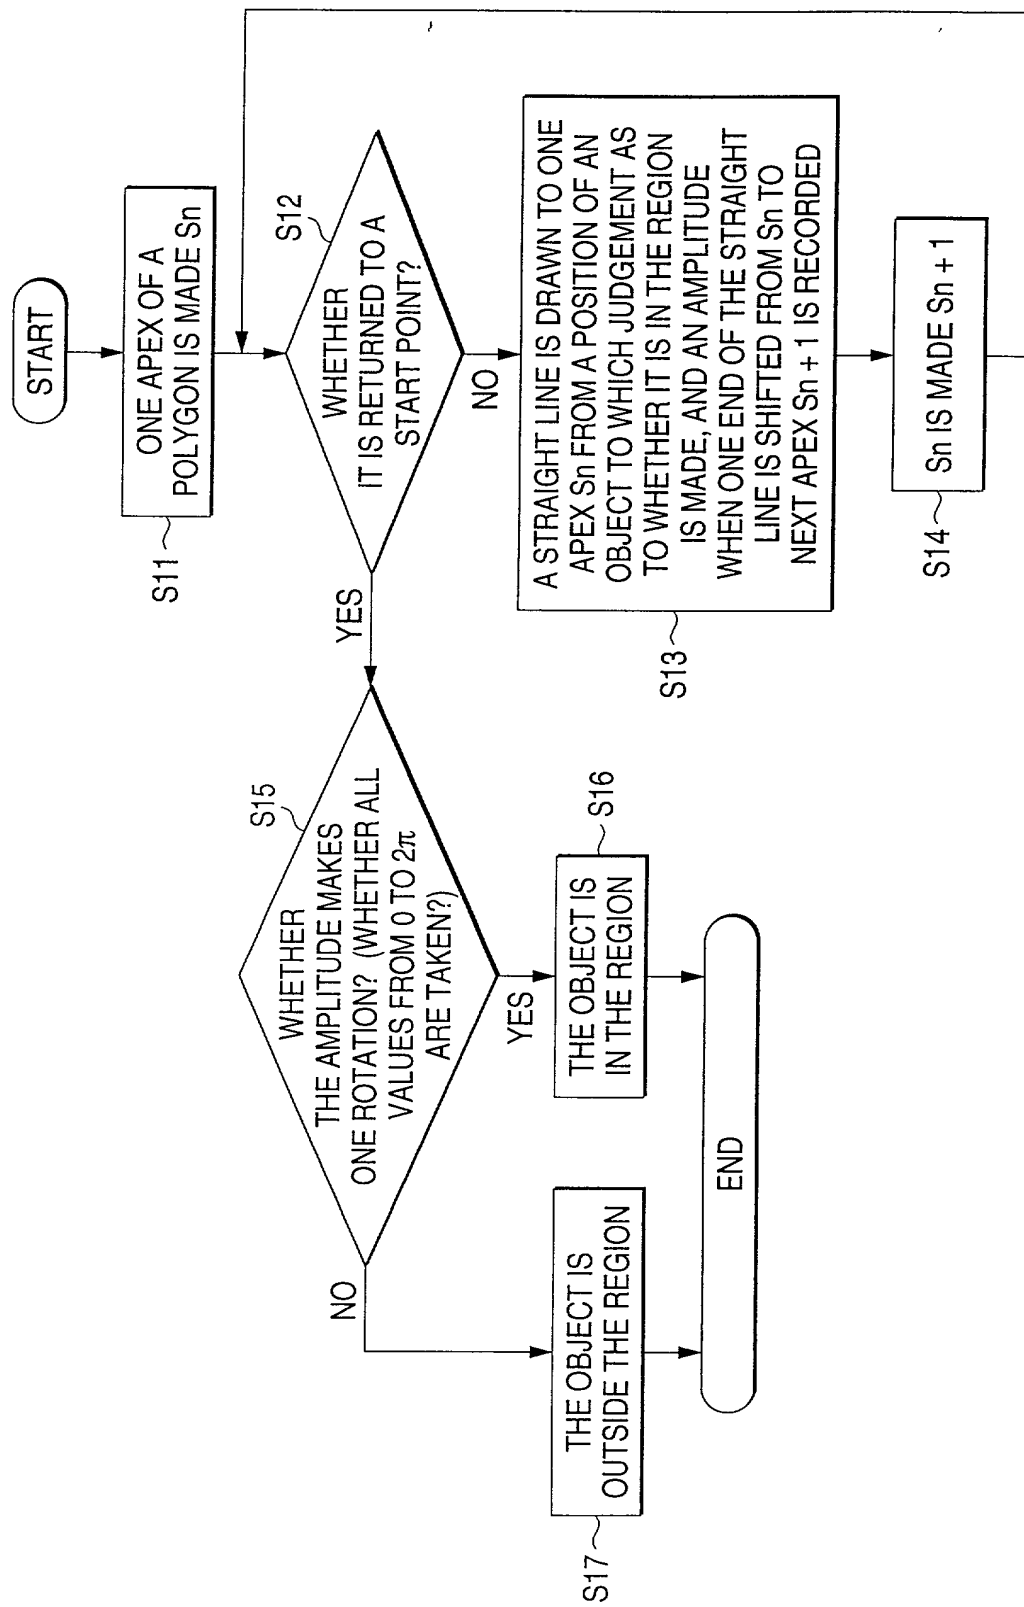

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

| | | | | | | | | | | | | | |
|--|--|----------------------------|---------------------------|----------------------------|---------------------------|----------------------------|--|---|--------------------------|--|--------------------------|--|--------------------------|
| 下記の氏名の発明者として、私は以下の通り宣言します。 | As a below named inventor, I hereby declare that: | | | | | | | | | | | | |
| 私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。 | My residence, post office address and citizenship are as stated next to my name. | | | | | | | | | | | | |
| 下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。 | I believe I am the original, first and sole inventor (if only one named is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled. <u>VIRTUAL SPACE SYSTEM, VIRTUAL SPACE CONTROL DEVICE, VIRTUAL SPACE CONTROL METHOD, AND RECORDING MEDIUM</u> | | | | | | | | | | | | |
| 上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、 <input type="checkbox"/> 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、 （該当する場合） _____ に訂正されました。 | the specification of which is attached hereto unless the following box is checked: <input type="checkbox"/> was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable). | | | | | | | | | | | | |
| 私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。 | I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. | | | | | | | | | | | | |
| 私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。 | I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56. | | | | | | | | | | | | |
| 私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。 | I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed. | | | | | | | | | | | | |
| Prior Foreign Application(s) 外国での先行出願 <table border="0"> <tr> <td>P11-333074 (Number) (番号)</td> <td>JAPAN (Country) (国名)</td> </tr> <tr> <td>_____ (Number) (番号)</td> <td>_____ (Country) (国名)</td> </tr> <tr> <td>_____ (Number) (番号)</td> <td>_____ (Country) (国名)</td> </tr> </table> | P11-333074 (Number) (番号) | JAPAN (Country) (国名) | _____ (Number) (番号) | _____ (Country) (国名) | _____ (Number) (番号) | _____ (Country) (国名) | Priority Not Claimed 優先権主張なし <table border="0"> <tr> <td>24 NOVEMBER 1999 (Day/Month/Year Filed) (出願年月日)</td> <td><input type="checkbox"/></td> </tr> <tr> <td>_____ (Day/Month/Year Filed) (出願年月日)</td> <td><input type="checkbox"/></td> </tr> <tr> <td>_____ (Day/Month/Year Filed) (出願年月日)</td> <td><input type="checkbox"/></td> </tr> </table> | 24 NOVEMBER 1999 (Day/Month/Year Filed) (出願年月日) | <input type="checkbox"/> | _____ (Day/Month/Year Filed) (出願年月日) | <input type="checkbox"/> | _____ (Day/Month/Year Filed) (出願年月日) | <input type="checkbox"/> |
| P11-333074 (Number) (番号) | JAPAN (Country) (国名) | | | | | | | | | | | | |
| _____ (Number) (番号) | _____ (Country) (国名) | | | | | | | | | | | | |
| _____ (Number) (番号) | _____ (Country) (国名) | | | | | | | | | | | | |
| 24 NOVEMBER 1999 (Day/Month/Year Filed) (出願年月日) | <input type="checkbox"/> | | | | | | | | | | | | |
| _____ (Day/Month/Year Filed) (出願年月日) | <input type="checkbox"/> | | | | | | | | | | | | |
| _____ (Day/Month/Year Filed) (出願年月日) | <input type="checkbox"/> | | | | | | | | | | | | |

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

私は、第 3 5 編米国法典 1 1 9 条 (e) 項に基いて下記の米
国特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code,
Section 119(e) of any United States provisional application(s)
listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第 3 5 編 1 2 0 条に基いて下記の米
国特許出願に記載された権利、又は米国を指定している特許
協力条約 3 6 5 条 (c) に基づく権利をここに主張します。また、
本出願の各請求範囲の内容が米国法典第 3 5 編 1 1 2 条
第 1 項又は特許協力条約で規定された方法で先行する米国特
許出願に開示されていない限り、その先行米国出願書提出日
以降で本出願書の日本国内または特許協力条約国際提出日ま
での期間中に入手された、連邦規則法典第 3 7 編 1 条 5 6 項
で定義された特許資格の有無に関する重要な情報について開
示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code,
Section 120 of any United States application(s), or 365(c) of any
PCT International application designating the United States,
listed below and, insofar as the subject matter of each of the
claims of this application is not disclosed in the prior United
States or PCT International application in the manner provided
by the first paragraph of Title 35, United States Code, Section
112, I acknowledge the duty to disclose information which is
material to patentability as defined in Title 37, Code of Federal
Regulations, Section 1.56 which became available between the
filing date of the prior application and the national or PCT
International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、保属中、放棄済)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、保属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表
明が真実であり、かつ私の入手した情報と私の信じるところ
に基づき表明が全て真実であると信じていること、さらに故
意になされた虚偽の表明及びそれと同等の行為は米国法典第
1 8 編第 1 0 0 1 条に基づき、罰金または拘禁、もしくはそ
の両方により処罰されること、そしてそのような故意による
虚偽の声明を行なえば、出願した、又は既に許可された特許
の有効性が失われることを認識し、よってここに上記のごと
く宣誓を致します。

I hereby declare that all statements made herein of my own
knowledge are true and that all statements made on information
and belief are believed to be true; and further that these
statements were made with the knowledge that willful false
statements and the like so made are punishable by fine or
imprisonment, or both, under Section 1001 of Title 18 of the
United States Code and that such willful false statements may
be jeopardize the validity of the application or any patent issued
thereon.

委任状: 私は下記の発明者として、本出願に関する一切の
手続きを米特許商標局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby
appoint the following attorney(s) and/or agent(s) to prosecute
this application and transact all business in the Patent and
Trademark office connected therewith (list name and
registration number)

Karl A. Limbach 18,689
George C. Limbach 19,305
John K. Uilkema 20,282
Neil A. Smith 25,441
Veronica C. Devitt 29,375
Ronald L. Yin 27,607
Gerald T. Sekimura 30,103
Michael A. Stallman 29,444
Philip A. Girard 28,848
Michael J. Pollock 29,098

Steven M. Everett 30,050
Alfred A. Equitz 30,922
Charles P. Sammut 28,901
Mark C. Pickering 36,239
Patricia Coleman James 37,155
Kathleen A. Frost 37,326
Alan A. Limbach 39,749
Douglas C. Limbach 35,249
Seong-Kun Oh*
Kyla L. Harriel 41,815
* Recognition under 37 CFR 10.9(b)

Mayumi Maeda 40,075
Charles L. Hamilton 42,624
Andrew V. Smith 43,132
Eric N. Hoover 37,355
Frank J. Mycroft 46,946
Robert M. McConnell 46,912
J. Thomas McCarthy 22,420
Joel G. Ackerman 24,307
Roger S. Sampson 44,314
Susan M. Schmitt 34,427
Edward B. Weller 37,468

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

| | |
|--|---|
| 書類送付先 | Send Correspondence to: Charles P. Sammut, Esq. Limbach & Limbach L.L.P. 2001 Ferry Building San Francisco, CA 94111-4262 |
| 直接電話連絡先： (名前及び電話番号) | Direct Telephone Calls to: (name and telephone number) Charles P. Sammut (415) 433-4150 |
| 唯一または第一発明者名 | Full name of sole or first inventor: SATORU MATSUDA |
| 発明者の署名 <div style="text-align: right;">日付</div> | Inventor's signature <div style="text-align: right;">Date</div> |
| 住所 | Residence KANAGAWA, JAPAN |
| 国籍 | Citizenship JAPAN |
| 私書箱 | Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN |
| 第二共同発明者名 | Full name of second joint inventor, if any KATSUSHIGE HATA |
| 第二共同発明者の署名 <div style="text-align: right;">日付</div> | Second Inventor's signature <div style="text-align: right;">Date</div> |
| 住所 | Residence TOKYO, JAPAN |
| 国籍 | Citizenship JAPAN |

Declaration and Power of Attorney For Patent Application**特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書****私書箱**

Post Office Address

c/o SONY CORPORATION
7-35, Kitashinagawa 6-chome
Shinagawa-ku, Tokyo, 141-0001 JAPAN